

## Bedding Lime #3

Alden, IA

Bedding Lime #3 is a large particle sized granular CaCO<sub>3</sub> product processed from quarried high calcium limestone in Alden, IA with minimum calcium content of 38%



## Particle Size Measurement -- Laser Diffraction


Average Particle Size = **1088.76** microns

Ave particle size: half of the particles are above and half are below this point on the "S" shaped cumulative distribution graph.

**% Ca 39.53**  
**% CaCO<sub>3</sub> 98.83**

Typical Analyses		
Magnesium (Mg)	0.118	%
Silicon (Si)	0.07	%
Silica (SiO <sub>2</sub> )	0.14	%
Iron (Fe)	0.145	%
Sodium (Na)	0.021	%
Potassium (K)	0.009	%
Sulfur (S)	0.888	%
Manganese (Mn)	0.015	%
Phosphorus (P)	0.007	%
Chloride (Cl)	0.004	%
Chromium (Cr)	7	ppm
Aluminum (Al)	107	ppm
Boron (B)	10	ppm
Barium (Ba)	< 5	ppm
Lead (Pb)	< 5	ppm
Nickel (Ni)	< 5	ppm
Cobalt (Co)	< 5	ppm
Copper (Cu)	29	ppm
Zinc (Zn)	118	ppm
Cadmium (Cd)	< 5	ppm
Iodine (I)	2	ppm
Arsenic (As)	< 5	ppm
Beryllium (Be)	< 5	ppm
Selenium (Se)	0.252	ppm
Mercury (Hg)	< 0.050	ppm
Vanadium (V)	< 5	ppm
Molybdenum (Mo)	< 5	ppm
Fluorine (F)	< 1	ppm
Bismuth (Bi)	< 5	ppm
Antimony (Sb)	< 5	ppm

% Acid Solubility	
Average	<b>46.80</b>
Maximum	<b>50.38</b>
Minimum	<b>42.40</b>
H <sub>2</sub> O	< 0.5%
Bulk Density	(lbs./cu.ft.)
Loose:	<b>77</b>
Packed:	<b>83</b>

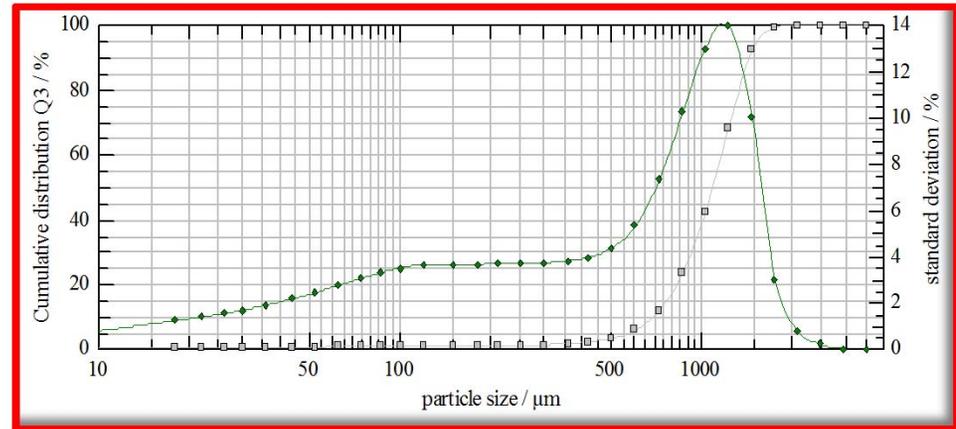

μm = micron (1/1000 of a millimeter)

Particle Distribution--U.S. Screen Comparison				
12 X 35 mesh product				
Micron Size	U.S. Screen	% Retained	% Passing	
2000	<b>10</b>	0.3	99.8	
1700	<b>12</b>	1.7	98.1	
1400	<b>14</b>	12.0	86.1	
1180	<b>16</b>	23.2	62.9	
1000	<b>18</b>	23.3	39.6	
710	<b>25</b>	28.4	11.2	
500	<b>35</b>	8.1	3.1	
425	<b>40</b>	1.1	2.0	
355	<b>45</b>	0.6	1.4	
300	<b>50</b>	0.3	1.1	
212	<b>70</b>	0.3	0.7	
180	<b>80</b>	0.1	0.6	
150	<b>100</b>	0.0	0.6	
75	<b>200</b>	0.1	0.6	
10	<b>Pan</b>	0.6		
		100.0		

cumulative distribution (laser diffraction)			
Microns	% Passing	Microns	% Passing
3500	100	210	0.73
2940	100	180	0.66
2460	99.99	150	0.64
2060	99.91	120	0.62
1740	99.06	100	0.61
1460	92.09	86	0.60
1220	68.11	74	0.59
1020	41.92	62	0.57
860	23.37	52	0.56
720	11.69	44	0.55
600	5.69	36	0.53
500	3.05	30	0.52
420	1.93	26	0.51
360	1.43	22	0.50
300	1.08	18	0.45
250	0.87		