

## Industrial Lime Extra Coarse

Weeping Water, NE  
Plant #1

Ind. Lime Extra Coarse is a coarse particulate CaCO<sub>3</sub> product processed in Weeping Water, NE from mined high calcium limestone with minimum calcium content of 38%



## Particle Size Measurement -- Laser Diffraction


Average Particle Size = **3193.11** microns

Ave particle size: half of the particles are above and half are below this point on the "S" shaped cumulative distribution graph.

**% Ca**            **39.24**  
**% CaCO<sub>3</sub>**      **98.10**

Typical Analyses		
Magnesium (Mg)	0.272	%
Silicon (Si)	0.73	%
Silica (SiO <sub>2</sub> )	1.56	%
Iron (Fe)	0.142	%
Sodium (Na)	0.025	%
Potassium (K)	0.024	%
Sulfur (S)	0.878	%
Manganese (Mn)	0.019	%
Phosphorus (P)	0.008	%
Chloride (Cl)	0.002	%
Chromium (Cr)	6	ppm
Aluminum (Al)	456	ppm
Boron (B)	14	ppm
Barium (Ba)	15	ppm
Lead (Pb)	< 5	ppm
Nickel (Ni)	< 5	ppm
Cobalt (Co)	< 5	ppm
Copper (Cu)	32	ppm
Zinc (Zn)	145	ppm
Cadmium (Cd)	< 5	ppm
Iodine (I)	3	ppm
Arsenic (As)	< 5	ppm
Beryllium (Be)	< 5	ppm
Selenium (Se)	0.56	ppm
Mercury (Hg)	<0.050	ppm
Vanadium (V)	< 5	ppm
Molybdenum (Mo)	14	ppm
Fluorine (F)	< 1	ppm
Bismuth (Bi)	< 5	ppm
Antimony (Sb)	< 5	ppm

% Acid Solubility	
Average	<b>27.63</b>
Maximum	<b>37.50</b>
Minimum	<b>20.83</b>
H <sub>2</sub> O	< 0.5%
Bulk Density	(lbs./cu.ft.)
Loose:	<b>88</b>
Packed:	<b>97</b>

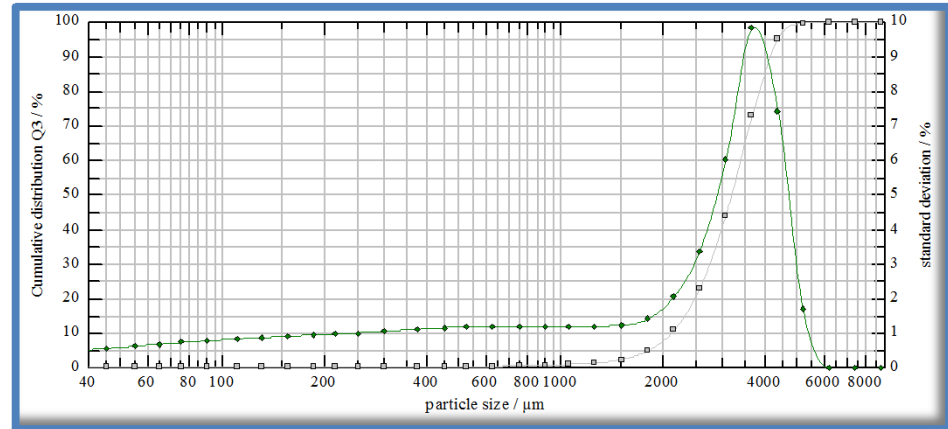

μm = micron (1/1000 of a millimeter)

Particle Distribution--U.S.Screen Comparison			
4 X 10 mesh product			
Micron Size	U.S.Screen	% Retained	% Passing
6700	<b>3</b>	0.0	100.0
5600	<b>3.5</b>	0.3	99.7
4750	<b>4</b>	15.8	84.0
3350	<b>6</b>	25.6	58.4
2360	<b>8</b>	41.4	17.0
2000	<b>10</b>	8.8	8.3
1700	<b>12</b>	4.3	4.0
1180	<b>16</b>	2.9	1.1
850	<b>20</b>	0.5	0.6
425	<b>40</b>	0.2	0.3
75	<b>200</b>	0.1	0.2
	<b>Pan</b>	0.2	
		100.0	

cumulative distribution (laser diffraction)			
Microns	% Passing	Microns	% Passing
8750	100	525	0.34
7350	100	450	0.34
6150	100	375	0.32
5150	99.50	300	0.30
4350	95.10	250	0.29
3650	72.86	215	0.28
3050	43.95	185	0.26
2550	22.64	155	0.25
2150	10.83	130	0.24
1800	4.84	110	0.23
1500	2.27	90	0.21
1250	1.25	75	0.20
1050	0.82	65	0.19
900	0.61	55	0.17
750	0.46	45	0.13
625	0.37		